

S300-W

BestPack™ Stretch Wrapper with Scale

Semi-automatic pallet wrapping machine

The BestPack™ S300-W stretch wrapper combines a built-in digital scale with the same technical capabilities from our heavy-duty, top of the line BestPack™ S300 model. With this upgrade, loads can be weighed as they're being wrapped and isolated load cells ensure accurate measurements by weighing only what's on the turntable. An "Easy Load" carriage and various film controls, such as a break detector and force to load and release, minimize film waste. This model also comes with motorized film pre-stretch and separate top and bottom wrap counters. For operations seeking high performance, the BestPack™ S300-W will maximize productivity with its easy-to-use design and intelligent pallet wrapping capabilities.

CBM Systems BestPack™ Stretch Wrapper



See what the BestPack™ S300-W can do for you!

- 1. Increase film stretch up to 300% with motorized film pre-stretch.
 - 2. Shorten wrapping cycle time to as little as 1 to 1½ minutes.¹
 - 3. Corner compensating Dancing Bar combats film tearing.



Plug and play-Start wrapping right away

Affix film to your pallet—then press start. In many cases, operators won't even need to adjust wrap settings between loads.



Improve load integrity and reduce shipping damage

Consistent performance and excellent load stability during transport keeps your load tightly secured more effectively than handwrapping.



Boost productivity and save on time

The ability to weigh as you wrap improves your packaging process and ensures the utmost efficiency.


Contact us for more information



S300-W Specifications

SSOO II SPECIFICAT	10113
Performance	
Speed*	25-35 loads/hour
Turntable Speed	12 RPM (variable)
Load Capacity	4,000 lbs
Turntable Size	58" diam
Max. Load Size	53"L x 53"W
Max. Load Height	82"H
Turntable	3/8" laser-cut steel plate
Weighing Types	Count & Accumulation
Weight Units	Lb/kg/g/oz/lb:oz
Indicator	Gross/Tare/Pre-set Tare/Zero
Film Delivery	
Film Delivery System	Motorized with Corner Compensating Dancing Bar
Film Stretch	Motorized Dual Rubber Rollers
Film Tension	Up to 220%
Motor-Assist Film Dispenser	Standard
Film Capacity	10" diam x 20"W (30"W option)
Film Carriage Speed	Adjustable
Height Sensor	Standard
Machine / Shipping Data	
Power Requirements	110V, 60 Hz, 20A
Pneumatic Requirements	None
Machine Dimensions	94"L x 59"W x 86"H
Weight (approximate)	1,000 lbs
Forklift Portable	Standard
Tilt-Down Tower	Standard

Machine Footprint

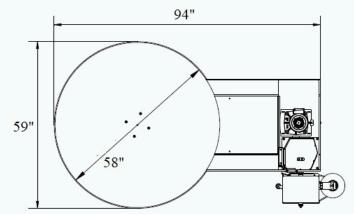

Make wrapping as easy as 1... 2... 3...!

Set down your pallet, hit start, and get wrapping!

- EASY LOAD film carriage and FILM FORCE release for easy pull at start of cycle
- Help prevent tears with smart corner compensating dancing bar
- Reinforce the top and bottom of your load with extra wraps (independent settings 0-9).
- Pre-stretch film up to 300%.
- Low maintenance...heavy-duty frame and roller support system.

Specifications subject to change without notice.

¹ Wrap speeds may vary depending on load configuration.

Options to improve performance



Loading Ramp

Load your machine with a pallet jack using the made-to-fit loading ramp.



Wrap tall loads with an extended wrap height column (16" increments) to accommodate your needs.



